

CRANE HOOKS

HOOKS

SAFETY QUICK RELEASE HOOKS



HCH 1,5 HCHT 3,5 / 6,5 / 10

Off-load Lifting hook for fast rescue crafts and other types of boats with lifting slings.

HOOK


HCH(T)

CRANE HOOKS

The HCH hooks are off-load crane hooks designed for lifting Fast Rescue Crafts, Man-Over-Board boats, Rigid Inflatable Boats (RIB) and tenders with a total weight of up to 10 000 kg. The HCH hooks are designed for use on small boats for military, offshore and the leisure market.

LIGHT WEIGHT

The Henriksen Crane Hooks differs from all our other hooks by being attached to the crane/davit instead of the boat. The advantage of attaching the hook to the boat, is that the weight of the crane line is kept at a minimum. A light line is safer and easier to handle, especially in rough weather. A crane hook adds more weight to the crane/davit line than a lifting ring and it is therefore critical to keep the weight of the crane hook at a minimum. All our crane hooks have therefore been designed to be as light as possible, and every HCH hook (except the smallest HCH 1,5) are all made exclusively out of grade 5 Titanium.

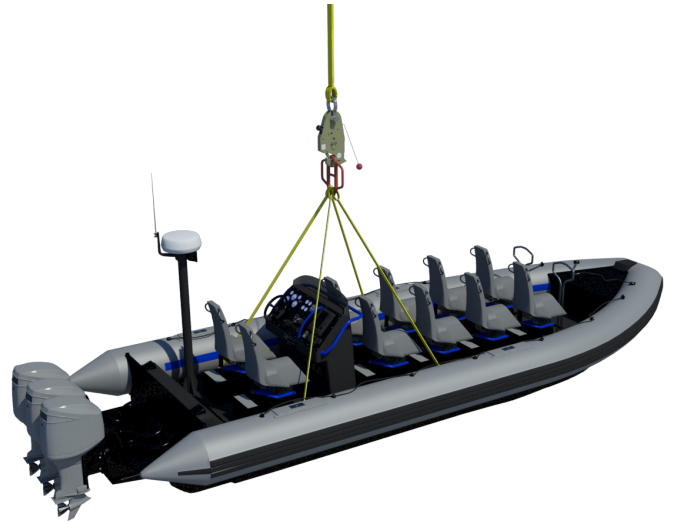

OPERATION OF AN OFF-LOAD CRANE HOOK

Launch


1. When the boat is close to water level, pull the release cord.
2. When the boat is waterborne, the hook will release automatically.

Recovery


1. Grab the hook.
2. Prepare for recovery by setting the reset lever into "closed position".
3. Close the hook.
4. Connect the lifting ring by pushing it into the hook.


The HCH hooks are available with several different connectors, depending on hook model. Please contact us for details about the different hooks and their connector options.

Thimble



Shackle



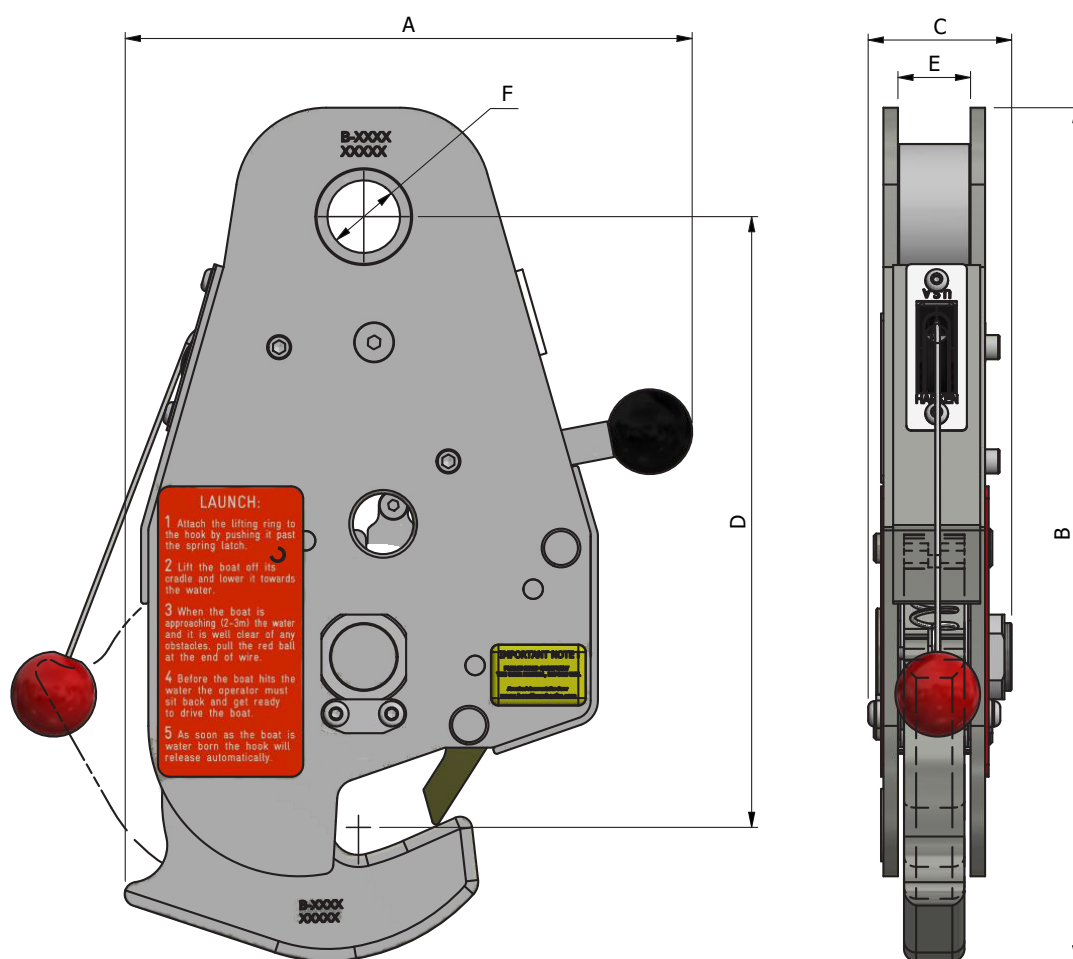

PART NO.	HOOK	SWL	A	B	C	D	E	F	WEIGHT
HH000032	HCH 1,5	1 650 kg	118	235	53	168	20	Ø20	2,22 kg
HH006911	HCHT 3,5	3 500 kg	177	303	50	209	31	Ø31	2,70 kg
HH000094	HCHT 6,5	6 500 kg	198	353	62	253	44	Ø30	5,90 kg
HH003470	HCHT 10	10 000 kg	231	379	78	251	57	Ø40	7,70 kg

Materials	High quality stainless steel / grade 5 titanium
Warranty	5 years (When the re-certification and annual inspection is followed) for all HCHT Hooks
Documentation	Certificates, Installation-, Operation-, and Maintenance Manual
Packaging	Wooden case
Optional Accessories	<ul style="list-style-type: none"> • Certified Thimbles and Shackles • Henriksen Lifting Ring



The HOOKS on this page are all tested and delivered with European Community "MED" CERTIFICATES approved by Det Norske Veritas. They are also approved by Transport Canada (several other certificates are also available on request). Test certificates are based upon IMO / SOLAS.

For more information please visit: www.hhenriksen.com

HENRIKSEN

H. Henriksen AS
Træleborgveien 15
3112 Tjønsberg
Phone: 333 78 400
Mail: hooks@hhenriksen.com