

HITCH HOOK

HOOKS
SAFETY QUICK RELEASE HOOKS**HHH 2,5**

On-load release hitch hook and painter hook for fast rescue crafts, RIBs, MOBs, working boats and other types of boats.

HOOKHHH**HITCH HOOK**

The Henriksen Hitch Hook is a hook for anchoring a loose rope to the bow of a working boat. The hook is an on-load hook with a load capacity of 2 500 kg in a pull horizontal and up to 45° from horizontal.

The hook has the capacity to release at any load within the load capacity.


SAFETY FEATURES

- Factory overload tested and certified
- Safety factor 4w
- Easy to install
- Easy to use
- Use with rope, wire or steel rings
- On-load release up to full SWL in all working angles
- Little to none maintenance needed
- Re-certified by manufacturer every 5 years

**HIGH QUALITY**


The HHH hook is made of only high grade stainless steel, which is the same material that is qualified to be used in Life Saving Appliances according to SOLAS. This makes the HHH hook almost maintenance free. The HHH can be mounted in the marine environment (salt water proof) without the need of any coatings or protection.

All Henriksen Hooks are delivered in a practical wooden box.

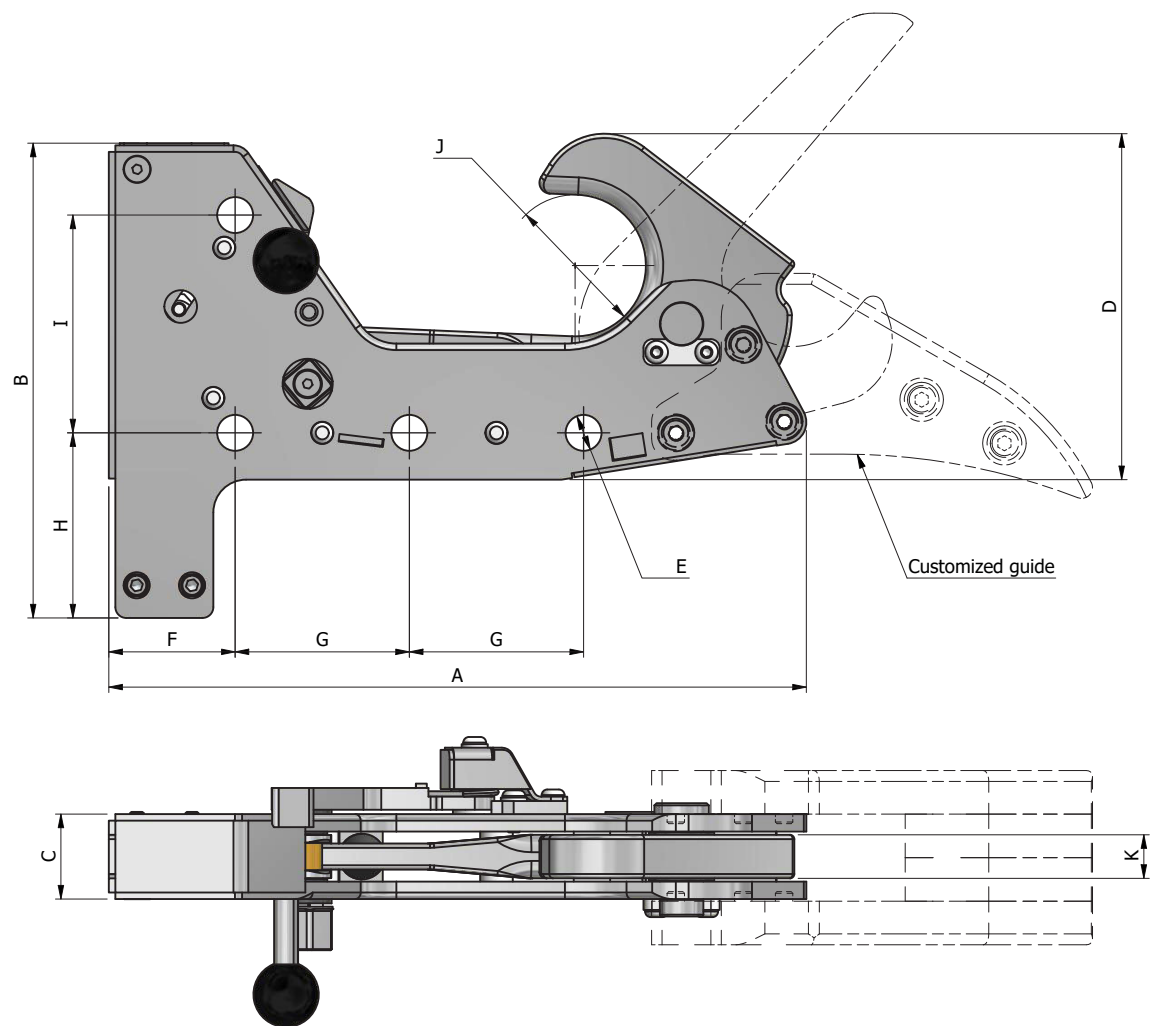

WORKING ANGLES

Vertical: From 0° to 45°
Horizontal: The direction of the load should be aligned with the axis of the boat.

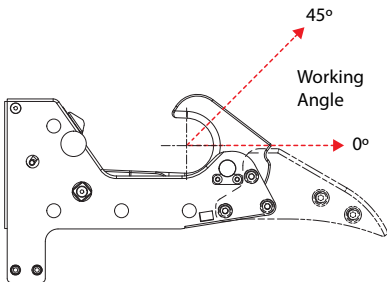

PART NO.	HOOK	SWL	A	B	C	D	E	F	G	H	I	J	K	WEIGHT
HH000235	HHH 2,5	2 500 kg	320	217	39	159	Ø16,5	58	80	85	100	Ø65	20	7,0 kg

Materials	High quality stainless steel
Warranty	5 years (When the re-certification and annual inspection is followed)
Documentation	Certificates, Installation-, Operation-, and Maintenance Manual
Packaging	Wooden case



The HOOKS on this page are all tested and delivered with product certificate and Type Approval Certificate from Det Norske Veritas (DNV) according to DNVGL-ST-0378

For more information please visit: www.hhenriksen.com



H. Henriksen AS
Træleborgveien 15
3112 Tønsberg
Phone: 333 78 400
Mail: hooks@hhenriksen.com