

REBS®

WIRE LADDERS

The new design of the wire ladders has the highest strength to weight ratio of any wire ladder in the world. The wire ladders have been developed with input from professional users and have high-end features for superior performance in tenuous situations. All ladders are delivered ready to use. The rungs are diamond knurled and provide a durable high friction grip surface.

Wire ladders are often used in combination with telescopic poles. The ladders are strong and rugged, but also compact in size, exceptionally light weight, and pack compactly and easily.

Our wire ladders are delivered completely prepared for immediate use. Every ladder is fitted with thimbles, proper connectors and checked and approved before they are put in stock for fast delivery.

Wire ladders are kept in stock in the standard lengths: 1,5 m, 5 m, 10 m, 15 m and 20 m (5, 16,5, 23, 33, 49 and 65,5 ft), but custom lengths can be delivered upon request.

The ladder has a market-leading minimum breaking load (MBL) of 1,200 kg.

The wire ladder is made with the highest quality components and materials. The Ø3 mm (1/8 in) wire rope and thimble are made from 316 stainless steel and the rungs are black anodized 6082 T6 aluminum.



BE000085 Distance Wheel can be added to any of our wire ladders. The Distance wheel can reduce pinching and make climbing easier and safer.




All wire ladders are delivered in a black nylon bag as standard.

Specifications	
Available lengths	1,5 - 5 - 7 - 10 - 15 - 20 m
Wire strength	1200 kg / 2645 lbs eye-eye
Step MBL	200 kg / 441 lbs (24 mm / 1" center load)
Step width	137 mm / 5.4"

The rungs are fastened to the wire rope with an innovative and very strong mechanical bond. The bond has been tested to 470 kg on a single side without breaking.



Available lengths		
Length	Part no.	Weight
1,5 (1,30) m / 4,9 ft	BE002460	0,33 kg / 0.73 lbs
5 (5,20) m / 16,4 ft	BE002420	0,92 kg / 2 lbs
7 m / 23 ft	BE002538	1,20 kg / 2.6 lbs
10 m / 32,8 ft	BE002461	1,75 kg / 3.8 lbs
15 (14,80) m / 49,2 ft	BE002462	2,43 kg / 5.35 lbs
20 (19,90) m / 65,6 ft	BE002463	3,26 kg / 7.2 lbs

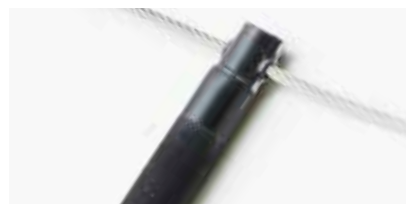

step with diamond knurled surface.



wire rope end with thimble.



wire rope end with thimble and carabiner hook.