


## SWIVEL JOINTS

**HOOKS**  
SAFETY QUICK RELEASE HOOKS

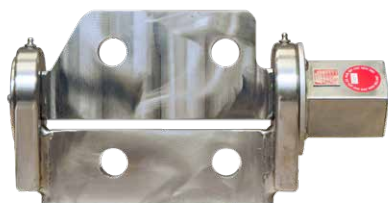



### HSL 3,5 / 5 / 8 / 12 / 15

The Swivel Joint is mounted in between the boat and the hook and is highly recommended on boats that are frequently used, or that may experience a sideways force during operation.

**SWIVEL HSL  
JOINT**

### SWIVEL JOINT

The Henriksen Swivel Joints are mounted between the Henriksen Hook and the lifting frame on the boat. The Swivel joint is designed to allow the Hook to pivot 30° (to each side) and thereby reducing the bending moment on the hook and on the lifting frame. This results in a smoother and safer experience for the operators and reduced operational risk.

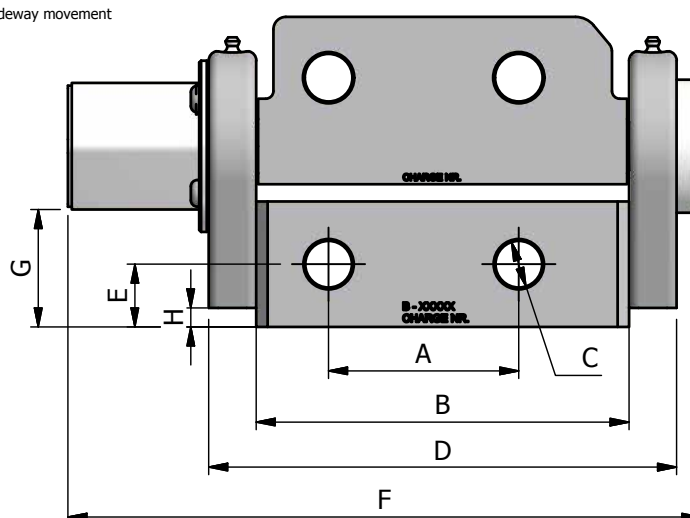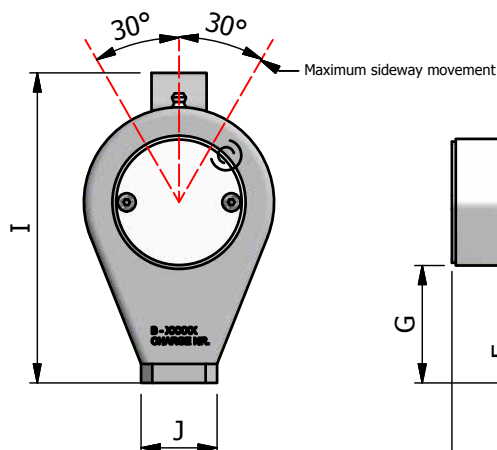

PART NO.	SWIVEL	SWL	A	B	C	D	E	F	G	H	I	J	WEIGHT
HH000106	HSL 3,5	3 500 kg	100	196	Ø24,5	246	33	337	61	10	163	40	15,2 kg
HH000075	HSL 5/8	8 000 kg	120	246	Ø31	296	45	397	72	15	205	45	23,0 kg
HH000074	HSL 12-35	12 000 kg	100	200	Ø31	260	36	360	11	11	314	35	37,0 kg
HH000052	HSL 15	15 000 kg	120	248	Ø41	308	45	410	30	15	215	50	30,5 kg